This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:		(11) International Publication Number:	WO 93/20349
F02M 61/18, B05B 1/30 F02M 51/06	A1	(43) International Publication Date:	14 October 1993 (14.10.93)

(21) International Application Number: (81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). PCT/US93/02405 (22) International Filing Date: 17 March 1993 (17.03.93)

(30) Priority data: 861,709 I April 1992 (01.04.92) US

(71) Applicant: SIEMENS AUTOMOTIVE L.P. [US/US]; 2400 Executive Hills Drive, Auburn Hills, MI 48326-2980 (US).

(72) Inventor: WAKEMAN, Russell, J.; 20 Evelyn Drive, Newport News, VA 23602 (US).

(74) Agent: BOLLER, George, L.; Siemens Automotive L.P., 2400 Executive Hills Drive, Auburn Hills, MI 48326-2980 (ŪS).


Published

With international search report.

(54) Title: INJECTOR VALVE SEAT WITH RECIRCULATION TRAP

An improvement in fuel flow through orifices (30) of a thin disc orifice member (22) is obtained by incorporating a radially inwardly open undercut (44) in the seat member (20) below the frustoconical seating surface (26) and above the thin disc orifice member. The undercut provides a space that allows a fuel recirculation zone to be displaced further radially outwardly so that it poses less of an obstruction to flow toward the orifice.

(57) Abstract

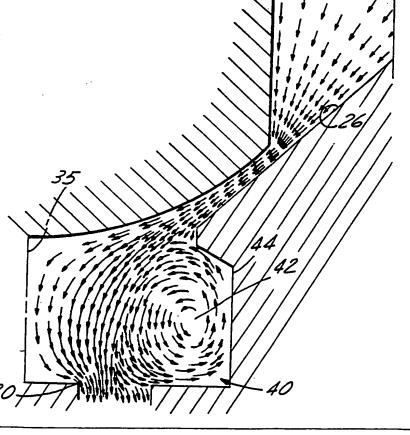

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

ΑT	Austria	FR	France	. MR	Mauritania
ΑU	Australia	GA	Gabon	MW	Malawi
BB	Barhados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinca	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal .
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	КР	Democratic People's Republic	SD	Sudan
CC	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SK	Slovak Republic
CI	Côte d'Ivaire	ΚZ	Kazakhstan	SN	Seuegal
CM	Canteroun	LJ	Liechtenstein	รบ	Soviet Union
cs	Czechoslovakia -	LK	Sri Lanka	TD	Chad
cz	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	UA	Ukraine
DK	Denmark	MG	Madagascar	US	United States of America
ES	Spain	Ml.	Mali	VN	Viet Nam
FI	Finland	MN	Moneolia		

1

INJECTOR VALVE SEAT WITH RECIRCULATION TRAP

Field of the Invention

5

10

15

20

25

30

35

This invention relates generally to electromechanical actuated fuel injector valves for internal combustion engines. More specifically, it relates to means for improving the flow through a thin disc orifice member in consequence of the unexpected discovery of the existence of a certain recirculation of fuel in the injector's sack volume during certain conditions of injector operation. This recirculation causes the flow through the disc's orifice(s) to exhibit significantly different velocity vectors at different locations within each orifice. While the ideal flow through an orifice is perfectly axial, some of these velocity vectors show a significant radial velocity component that not only detracts from the axial flow but also laterally disperses the injected fuel. A sufficiently large amount of dispersion may wet an adjacent wall of a manifold runner downstream from the fuel injector's nozzle in a manner that is detrimental to exhaust emissions from the engine.

Background and Summary of the Invention

The nozzle end of one type of electromechanical actuated fuel injector comprises a frustoconical valve seat that funnels to a central circular hole that is covered by a thin disc orifice member having one or more orifices. An internal actuating mechanism comprises a needle having a spherically contoured tip that is seated on and unseated from the valve seat to open and close the flow through the fuel injector. When the fuel injector is open to flow, fuel passes through the lift opening that is created between the needle tip and the valve seat by the lifting of the tip from the seat. From there the fuel flow converges toward and enters the central circular hole. The orifices in the thin disc member are at the bottom of this central circular hole, but out of the direction of the converging flow that enters the hole, and as a result, the fuel flow must bend in order to pass to the orifices, and bend fairly sharply at that.

The purpose of each orifice in the thin disc orifice member is to inject a stream of fuel that is perpendicular to the plane of the orifice in accordance with a pressure vs. flow characteristic of the orifice. Such

2

10

15

20

25

30

orifice members have heretofore been constructed as a flat disc that is disposed perpendicular to the main axis of the injector so that fuel is injected from each orifice as a stream that is parallel to that axis, or as a disc that has a centrally protruding conical dimple containing one or more orifices so that fuel is injected from each such orifice as a stream that is non-parallel to the injector axis, but is aimed in a desired direction. In actuality, injection streams from the orifices of thin disc orifice members are not perfectly ideal, but rather exhibit some degree of divergence.

To the extent, if at all, that the flow through an orifice of a thin disc orifice member may have been considered to be other than perfectly uniform at any location around the orifice during certain conditions of injector operation, the degree and nature of possible non-uniformity appear not to have heretofore been fully appreciated. The present invention is a result of the quite remarkable and unexpected discovery that for at least certain conditions of operation of certain fuel injectors, particularly at low injector lifts, there exists a rather startling disparity in fuel velocity vectors across an orifice. It is believed that this phenomenon is a consequence of the injector geometry that requires the flow to make the rather sharp bend described above as it passes from the lift opening to the orifice.

The nature of this phenomenon, which has been developed analytically and confirmed by empirical observation, involves the creation of a zone in which a portion of the liquid fuel flowing toward an orifice is recirculated before reaching the orifice. This recirculation may be considered as an eddy that, as it approaches the orifice, curves radially outwardly away from the orifice, then curves axially upwardly along the wall of the central circular hole, and then curves radially inwardly and finally again axially downwardly toward the orifice.

Briefly, the invention comprises the inclusion of an undercut in the central circular hole between the downstream terminus of the frustoconical seating surface and the thin disc orifice member. The undercut provides a space for the recirculation zone with the result that the recirculation zone is displaced farther radially outwardly thereby diminishing its adverse influence on the flows through the orifices of the thin disc orifice member.

3

The foregoing, along with further details and other advantages and benefits of the invention, will be seen in the ensuing description and claims which should be considered in conjunction with the accompanying drawings. the drawings disclose a presently preferred embodiment of the invention according to the best mode contemplated at this time for carrying out the invention.

Brief Description of the Drawings

10

15

20

25

30

35

Fig. 1 is a longitudinal view, having portions sectioned away, of a known electromechanical fuel injector into which the present invention may be advantageously incorporated.

Fig. 2 is an enlarged view of the nozzle end of the fuel injector of Fig. 1.

Fig. 3 is an enlarged view of a portion of Fig. 2 illustrating typical flow vectors for a certain amount of valve lift.

Fig. 4 is a view like Fig. 4, but for a greater amount of valve lift.

Fig. 5 is a fragmentary cross sectional view of a detail of a representative modification to the fuel injector, in accordance with the invention.

Fig. 6 is a view for substantially the same amount of valve lift as that of Fig. 3, but with the modification of Fig. 5 having been incorporated into the fuel injector.

Fig. 7 is a view for substantially the same amount of valve lift as that of Fig. 4, but with the modification of Fig. 5 having been incorporated into the fuel injector.

Description of the Preferred Embodiment

Figs. 1 and 2 show a known representative fuel injector 10 into which the present invention may be advantageously incorporated. It is a top feed type having a nozzle 12 at its lower end and an inlet 14 at its upper end. The internal operating mechanism comprises means for axially reciprocating a needle 16 by the selective energization and de-energization of a solenoid 17. The construction for nozzle 12 comprises a needle guide member 18, a seat member 20, a thin disc orifice member 22, and a retainer 24, stacked and captured within the

nozzle. Seat member 20 has a frustoconical seating surface 26 with which the spherically contoured tip end of needle 16 coacts. Figs. 1 and 2 show the needle seated, thereby closing a central circular hole 28 that extends through member 20 from the lower terminus of seating surface 26. Member 22 is disposed against the lower face of member 20 and comprises one or more orifices 30 in communication with hole 28. Member 24 contains a much larger hole 32 communicating with orifice(s) 30. Needle guide member 18 has a central circular hole 25 that aids in guiding the axial reciprocation of needle 16 to and from seating surface 26. It also has several holes 34 that provide for liquid fuel that has been introduced into the interior of the fuel injector via inlet 14 to flow to the space between the needle and the seating surface.

When the fuel injector is operated to unseat, or lift, needle 16 from seating surface 26, a lift opening is created between the spherically contoured tip end of the needle and the seating surface. Fuel flows through this opening, passing in the direction of the convergence of the seating surface to enter hole 28. It continues through the hole and injected from the injector via orifice(s) 30.

Fig. 3 shows a representative steady state flow for a certain amount of valve lift. Upstream of the lift opening, the flow velocity vectors point toward the lift opening and become increasingly larger in magnitude as the flow approaches the lift opening. Thus, the fuel flow accelerates as it approaches and passes through the lift opening. Fig. 3 shows an orifice disc wherein the illustrated orifice 30 is not coaxial with the centerline 35 of the injector. Consequently, the fuel flow is required to execute a bend as it enters and passes through hole 28.

It has been discovered that the flow velocity through orifice 30 is not uniform over the orifice's flow area. In particular the flow vectors show the existence of a recirculation zone 40 that has an approximate center at 42. Thus fuel that approaches approximately the right one-third of the orifice as viewed in Fig. 3 does so with velocity that has a significant radial component and an axial component that is noticeably diminished from the axial velocities of flow through approximately the center one-third of the orifice. The flows at approximately the left one-third of the orifice have a noticeable radial component as they approach the orifice, but they tend to

5

10

15

20

25

30

straighten out as they pass through the orifice. It is believed reasonably fair to conclude that the recirculating flow is caused by the need for the flow to execute a bend in making the transition from the seat member to the orifice. The recirculation zone is the result of some of the fuel approaching the orifice being recirculated as an eddy before it reaches the orifice thereby tending to reduce fuel flow through one portion of said orifice in comparison to fuel flow through another portion of said orifice.

Fig. 4 shows the same phenomenon for a somewhat greater lift than that of Fig. 3.

The invention comprises a solution for ameliorating the tendency toward reduced flow through one portion of the orifice on account of such recirculation zone. It comprises the inclusion of an undercut 44 in member 20, such as depicted by Fig. 5. The undercut lies between seating surface 26 and orifice 30 and has a size and shape that provides for a substantial portion of the recirculation zone to occupy the undercut. This effectively displaces the recirculation zone in a direction out of the path of the bend in the fuel flow so as to cause the flow through the righthand portion of the orifice to more closely approach the flow through the lefthand portion. The undercut comprises a circular groove that is coaxial with the axis of seating surface 26, that is radially inwardly open, and that is disposed radially outwardly of the orifice and axially between the seating surface and the orifice.

Representative improvement that is obtained by the incorporation of the undercut is depicted by Figs. 6 and 7 which should be compared against Figs. 3 and 4 respectively. While the recirculation zone is still present, its center is displaced outwardly beyond the orifice by virtue of incorporating the invention into the fuel injector. The result is a more uniform flow over the flow area of the orifice.

It should be understood that the illustrated embodiment and resulting improvement are representative. While a presently preferred embodiment has been illustrated and described, principles are applicable to other embodiments.

6

WHAT IS CLAIMED IS:

10

15

20

25

30

A fuel injector comprising a body having an inlet at which pressurized liquid fuel is delivered to the fuel injector, a nozzle from which the fuel injector injects fuel, passage means for conveying fuel from said inlet to said nozzle, said nozzle comprising an orifice through which fuel is injected from the nozzle, said passage means comprising a seating surface that is disposed upstream of said orifice proximate said orifice and that converges in the downstream direction, an electromechanically actuated mechanism comprising a valve member that is operated to selectively seat on and unseat from said seating surface and thereby allow and disallow fuel to be injected through said orifice, said seating surface and said valve member being constructed to have a coaction that, when said valve member is unseated from said seating surface to define a lift opening between them, directs the fuel in the direction of the convergence of said seating surface, said orifice being disposed out of the direction of the convergence of said seating surface such that fuel that has already passed through said lift opening and is flowing in the direction of convergence of said seating surface is required to execute a bend that diverges from the direction of the convergence of said seating surface before it passes through said orifice resulting in the creation of a fuel recirculation zone wherein some of the fuel approaching said orifice is recirculated as an eddy before it reaches said orifice thereby tending to reduce fuel flow through one portion of said orifice in comparison to fuel flow through another portion of said orifice, characterized by a solution for ameliorating such tendency toward reduced flow through said one portion of said orifice on account of such recirculation zone comprising an undercut that is disposed in said passage means between said seating surface and said orifice and that has a size and shape that provides for a substantial portion of the recirculation zone to occupy said undercut and effectively displace the recirculation zone in a direction out of the path of said bend so as to cause the flow through said one portion of said orifice to more closely approach the flow through said another portion of said orifice.

7


- 2. A fuel injector as set forth in claim 1 characterized further in that said seating surface and said undercut are embodied in a common part that is assembled into the fuel injector.
- 3. A fuel injector as set forth in claim 2 characterized further in that said orifice is in a thin disc orifice member that is assembled into the fuel injector and is disposed against said part.
- 4. A fuel injector as set forth in claim 3 characterized further in that said fuel injector has a main longitudinal axis and said orifice lies in a plane that is perpendicular to that axis.
- 5. A fuel injector as set forth in claim 3 characterized further in that said fuel injector has a main longitudinal axis and said orifice lies in a plane that is non-perpendicular to that axis.
- 6. A fuel injector as set forth in claim 3 characterized further in that said fuel injector has a main longitudinal axis and said thin disc orifice member comprises plural such orifices arranged circumferentially spaced apart from each other about that axis.
- 7. A fuel injector as set forth in claim 1 characterized further in that said seating surface is frustoconical and said undercut comprises a circular groove that is coaxial with the axis of said frustoconical seating surface, that is radially inwardly open, and that is disposed radially outwardly of said orifice and axially between said seating surface and said orifice.
- 8. A fuel injector as set forth in claim 7 characterized further in that said frustoconical seating surface and said groove are embodied in a common part that is assembled into the fuel injector.

ş


9. A fuel injector as set forth in claim 8 characterized further in that ___ said orifice is in a thin disc orifice member that is assembled into the fuel injector and is disposed against said part.


8

- 10. A fuel injector as set forth in claim 9 characterized further in that said orifice lies in a plane that is perpendicular to the axis of said frustoconical seating surface.
- 11. A fuel injector as set forth in claim 9 characterized further in that said orifice lies in a plane that is non-perpendicular to the axis of said frustoconical seating surface.
- 12. A fuel injector as set forth in claim 9 characterized further in that said thin disc orifice member comprises plural such orifices arranged circumferentially spaced apart from each other.
- 13. A fuel injector as set forth in claim 7 characterized further in that the upstream terminus of said groove is spaced axially of the downstream terminus of said frustoconical seating surface.

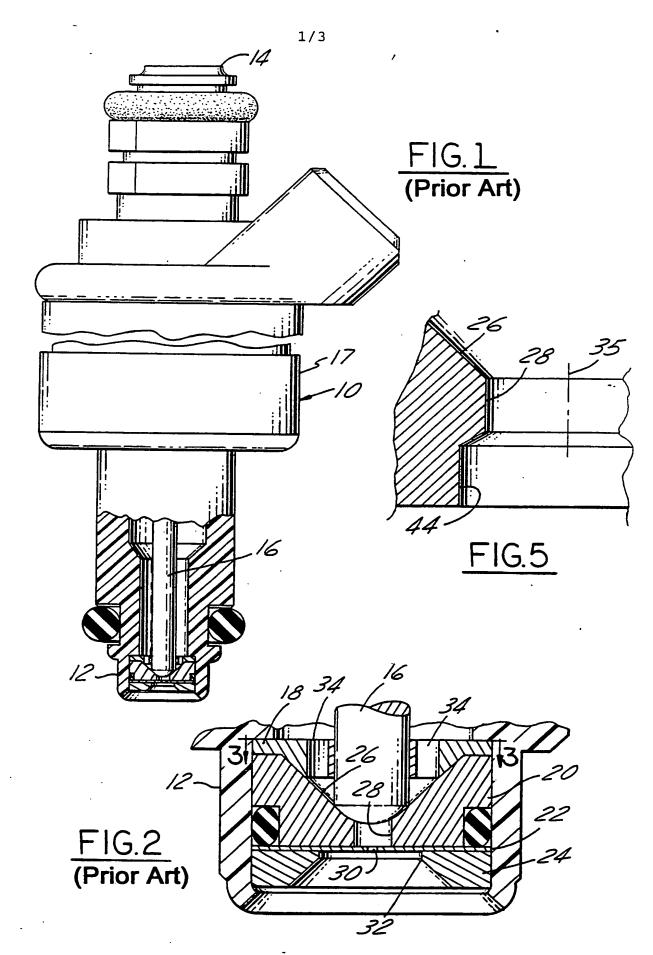

4

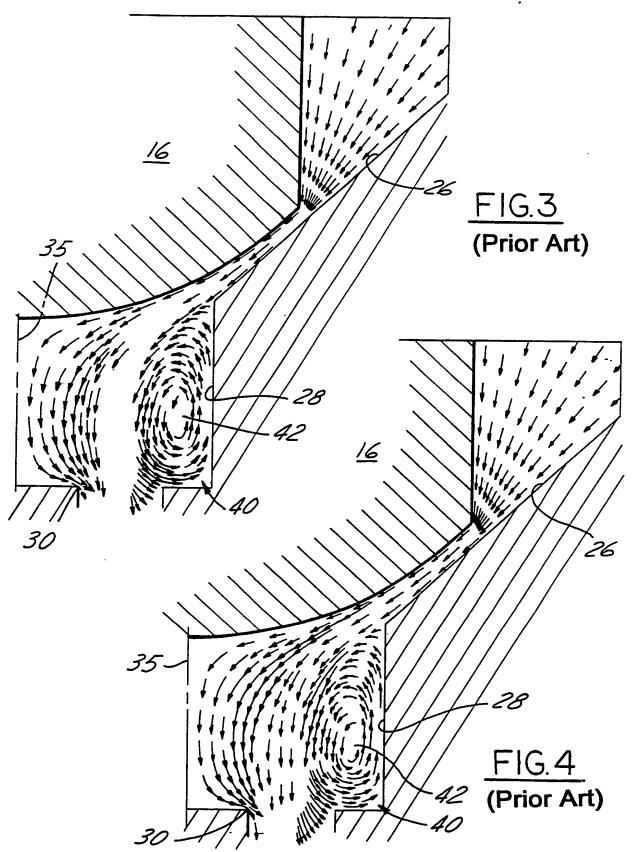

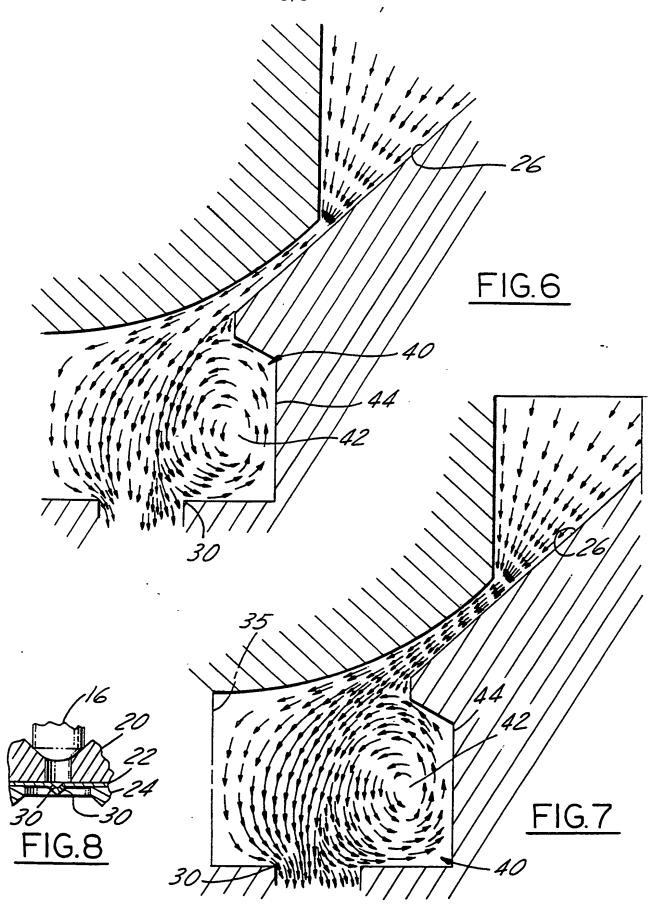

International Application No

PCT/US 93/02405

I. CLASS	IFICATION OF SUBJ	ECT MATTER (if several classificati	ion symbols annly, indicate all\6	
		t Classification (IPC) or to both Nation		
	1. 5 F02M61/1		F02M51/06	
II. FIELD:	S SEARCHED			
		Minimum Doc	cumentation Searched?	
Classifica	ition System	·	Classification Symbols	
Int.Cl	. 5	F02M ; B05B		
			other than Minimum Documentation ents are Included in the Fields Searched ⁸	
III. DOCU	MENTS CONSIDERE	D TO BE RELEVANT 9		
Category °	Citation of Do	ocument, ¹¹ with indication, where appr	ropriate, of the relevant passages 12	Relevant to Claim No.13
A	7 Februa	101 444 (SIEMENS) ary 1991 tract; figure 2		1
A	DE,U,9 1 & FAHRZE 18 April see figu	1		
A	18 May 1	904 399 (BURGGRAAFF) 1989 Fract; figure		1
	al categories of cited doc		"T" later document published after the intern	
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "O" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "A" document of particular relevance; the claim cannot be considered novel or cannot be considered novel or cannot be considered novel or cannot be considered to involve an invention or other means "A" document of particular relevance; the claim cannot be considered novel or cann		ry underlying the imed invention considered to imed invention tive step when the other such docu- o a person skilled		
IV. CERTI	FICATION			
Date of the	Actual Completion of th	he International Search	Date of Mailing of this International Sea	2 9, 08, 93
Internationa	al Searching Authority EUROPEA	N PATENT OFFICE	Signature of Authorized Officer MOUTON J.M.M.P.	

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

US 9302405 SA 71689

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15/6

15/06/93

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO-A-9101444	07-02-91	US-A- JP-T-	5016819 4502659	21-05-91 14-05-92
DE-U-9100824	18-04 - 91	EP-A-	0496052	29-07-92
WO-A-8904399	18-05-89	NL-A- AU-A- EP-A-	8702618 2620088 0363444	01-06-89 01-06-89 18-04-90